

ACCESSORIES for DEPOSIT CONTROL SYSTEMS

For additional information: visit www.triangularwave.com • E-mail: info@triangularwave.com • triwaveinc@aol.com


ITEM NUMBER & PRODUCT DESCRIPTION:	CASE/ PACK	APPROX SHIP WEIGHT
TWT-HTK Hardness Test Kit	1	BOV
TWT-TDSHH1 Pocket Size Hand Held TDS Meter	2	BOV
TWT-TDSMIL2 In Line TDS Meter	1	BOV
TWT-WS-55 55 feet Wire Spool	6	BOV
TWT-WS-125 125 feet Wire Spool	6	BOV
TWT-WST-55 55 feet Wire Spool-Teflon Coated	6	BOV
TWT-WST-125 125 feet Wire Spool-Teflon Coated	6	BOV
TWT-PT-10 Set of 10 Plastic Ties	6	BOV
TWT-8449-25 Flex Tubing–25 ft	1	BOV
TWT-8449-50 Flex Tubing–50 ft.	1	BOV
TWT-8449-100 Flex Tubing–100 ft.	1	BOV
TWT-LP-70F CSE Black Box (to mount & enclose a CSE unit)	6	BOV
TWT-8398 (2 pk) Connectors for Flex Tubing/Black Box (above) Qty 2 for each CSE unit	6	BOV
TWT-05SOV 1/2" Commercial/Industrial Manual Shut-Off Valve	2	BOV
TWT-75SOV 3/4" Commercial/Industrial Manual Shutoff Valve (need two valves per system)	2	BOV



TWT-CTDSCM-02 Conductivity / TDS Controller / Meter Kit



Controller

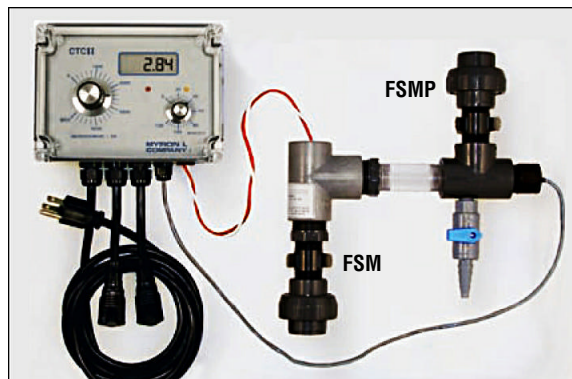

In-Line Conductivity/TDS Controller/Meter Kit – Five (5) unit kit

CTCIID-Controller

FSM – Flow switch & manifold

FSMP – Mounting panel (horizontal or vertical mounting)

MBV – Mini ball valve (sample port)

SQCO – Quick-Connect, sensor cable

Other kits available upon request

BOV: Based on volume and/or related products ordered at time of purchase

ULTRA-VIOLET DISINFECTION/PURIFICATION SYSTEM ACCESSORIES–TWT®MD/DP Systems

For additional information: visit www.triangularwave.com • E-mail: info@triangularwave.com • triwaveinc@aol.com

ITEM NUMBER &	PRODUCT DESCRIPTION:
TWT-4-UV/MS-1	Ultraviolet Monitoring System 120 / 60 Hz
TWT-4-UV/MS-2	Ultraviolet Monitoring System 230 / 50 Hz
TWT-4-UV/LD-12	Lite Detective 12 Volt
TWT-4-UV/MS-12E	Lite Detective 12 Volt (Euro Adapter)



SOLENOID VALVE - STOPS the WATER FLOW in the EVENT of a SYSTEM FAILURE–TWT®MD/DP Systems

TWT-4-SV500-1	.5" Solenoid Valve 120 V / 60 Hz
TWT-4-SV500-2	.5" Solenoid Valve 230 V / 50 H
TWT-4-SV750-1	.75" Solenoid Valve 120 V / 60 Hz
TWT-4-SV750-2	.75" Solenoid Valve 230 V / 50 Hz
TWT-4-SV1000-1	1" Solenoid Valve 120 V / 60 Hz
TWT-4-SV1000-2	1" Solenoid Valve 230 V / 50 Hz
TWT-4-SV1250-1	1.25" Solenoid Valve 120 V / 60 Hz
TWT-4-SV1250-2	1.25" Solenoid Valve 230 V / 50 Hz
TWT-4-SV1500-1	1.25" Solenoid Valve 120 V / 60 Hz
TWT-4-SV1500-2	1.25" Solenoid Valve 230 V / 50 Hz
TWT-4-SV2000-1	2" Solenoid Valve 120 V / 60 Hz
TWT-4-SV2000-2	2" Solenoid Valve 230 V / 50 Hz



PURGE VALVE for ULTRAVIOLET (UV) PURIFIER SYSTEMS

TWT-UVPV-75	<p>UV-Temperature Sensitive Automatic Purge Valve–Control water temperature in UV systems for enhanced results</p> <ul style="list-style-type: none">• No electrical power required• Purges water from chamber at 104F• Temperature sensitive alloy provides the trigger• Keeps system cool–no overheating and alarms• 3/4" valve–fits into plumbing as pictured (T-fitting not included: available upon request)• One TWT-UVPV-75 unit needed for most UV system applications• 10' of tubing and barb fitting included (run to drain, sump or back to well)• Longer length tubing available upon request• Brass construction
--------------------	--

